

PXR-A1MWS-WR Weatherproof Reader



Features

- Conforms to ISO 14443A, supporting MIFARE card.
- IP66 rated ingress protection, suitable to install indoor and outdoor environments.
- Unique ID or Block read format supported and programmable key value.
- Provides Wiegand & RS-485 communication interfaces for more flexible applications.
- Wide range of operating temperature to meet the requirements of tropical or frigid zone climate environment.
- Case sensor detection function to enhance the system security.
- Watchdog function secures system free from halting.


Ordering Information

Package Content:

- PXR-A1 x 1
- Quick Start Guide x 1
- Accessory Pack x 1

Model No. Identification

P X R - A 1 M W S - W R

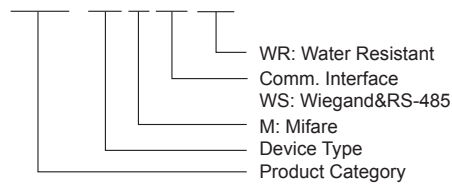

Color

●
Black
(BL)

Specifications

Model No.	PXR-A1MWS-WR
Read Format	Mifare (13.56 MHz)
Read Range	3-5 cm
Comm. Interface	Wiegand & RS-485
Input Ports	Case Sensor x 1
ID Setting	DIP switch
Comm. Baudrate	19,200 bps-N-8-1
LED Indicators	Power / Comm.
Beep Tone	Buzzer
Ingress Protection	IP66
Power Input	DC 12V / 1A
Current Consumption	200mA (max)
Operating Temp.	-20°C~ 70°C / -4°F~ 158°F
Relative Humidity	20% ~ 80%(Non-condensing)
Dimensions (LxWxH)(mm)	120 x 80 x 27