

PXR-52 Mifare Keypad Reader



Features

- Conforms to ISO 14443A, supporting MIFARE card.
- Unique ID or Block read format supported and programmable key value.
- Keypad function. When working with controller, it provides unlock modes including card-swiping, pressing card number by keypads or card-swiping with password to access
- If the keypad is disabled but under the entry mode of swiping card with password, the reader will enable keypad automatically after swiping card and then disable it again immediately after enter the password
- Provides different communication interface with controller.
- Provides RS-485 communication interface for long distance installation.(PXR-52MSK)
- Rubber material keypad , with the splash-proof mechanical design
- Wide range of operating temperature to meet the requirements of tropical or frigid zone climate environment.
- Case sensor detection function.
- Watchdog function secures system free from halting.


Ordering Information

Package Content:

- PXR-52 x 1
- Quick Start Guide x 1
- Accessory Pack x 1

Model No. Identification

PXR-52MTK

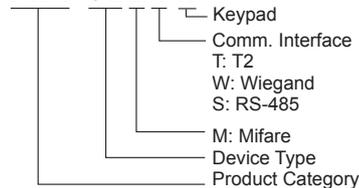

Color

●
Dark Grey
(DG)

Specifications

Model No.	PXR-52MTK	PXR-52MWK	PXR-52MSK
Read Format	Mifare (13.56 MHz)		
Read Range	3-5 cm(max)		
Comm. Interface	T2	Wiegand	RS-485
Keypad	12 Key (0-9, CE, Enter)		
Input Port	Case Sensor x 1		
ID Setting	NONE		DIP switch setting
Comm. Baudrate	NONE		19,200 bps-N-8-1
LED Indicator	Power / Comm.		
Beep Tone	Buzzer		
Power Input	DC 12V / 1A		
Current Consumption	200mA (max)		
Operating Temp.	-10°C~ 70°C / 14°F~ 158°F		
Relative Humidity	20% ~ 80%(Non-condensing)		
Dimension (LxWxH)(mm)	120 x 76 x 23		