


ACU-100E

Single Door Slave Control Panel

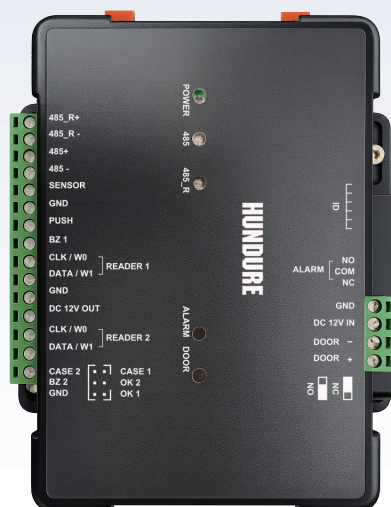

Features

- Provide 2 relay outputs for electronic lock and alarm.
- ACU-100E slave control panel works with GCU 、 RAC-2400.
- Control panel and reader separate design, maximum connects 2 ABA Track 2 / Wiegand readers. Able set two-way readers or reader in and exit button out.
- Watchdog function ensures accurate system free from halting.
- Provide RS-485 comm. interface, ensure electronic lock and alarm controlled by main controller.
- Provide optical coupled isolated sensors for door sensor, exit button and reader tamper.
- Auto-Learning function. 470 valid cards capacity under standalone operation mode.
- ESD / Surge protection design to protect devices & enhance communication quality.
- Control panel holder & block terminal ensure easy installation & easy maintenance.

Ordering Information

Package Content:

- ACU-100E x 1
- Quick Start Guide x 1
- Cable x 2

Optional Accessories:

- T2/Wiegand Proximity Reader

Specifications

Input Ports	4 Sensors (Door Sensor x 1 、 Exit Button x 1 、 Case Sensor x 2)
Output Ports	2 Relays (Door Lock x 1 、 Alarm x 1)
Cardholders	470
LED Indicator	Power / Output Status / Comm.
ID Setting	DIP switch setting
Reader Port	ABA-Track2 / Wiegand
Power Input	DC 12V / 1A
Current Consumption	300mA (excluding slave reader)
Comm. Interface	RS-485
Comm. Baudrate	19,200 bps-N-8-1
Operating Temp.	-10°C ~ 55°C / 14°F ~ 131°F
Relative Humidity	20% ~ 80% (Non-condensing)
Dimension	145mm (L) x 129.5mm (W) x 36.5mm (H)
Weight (Device)	334g

System Architecture

