


MDL-300H / 100WR / 100S / 200S


Electromagnetic Lock




MDL-300H



MDL-100WR



MDL-100S




MDL-200S

Specification


Model	MDL-300H	MDL-100WR	MDL-100S	MDL-200S
Holding Force	300LB	600LB	600LB	1200LB
Installation	Exposed Type	Exposed Type	Exposed Type	Exposed Type
Water-proof	N/A	Yes	N/A	N/A
Application	Outswing door, inswing door, drawer and cupboard.	Outdoor Environment	Outswing door, Inswing door	Outswing door, Inswing door
Power Input	DC-12V/ 360mA	DC-12V/ 500mA, DC-24V/ 250mA	DC-12V/ 500mA	DC-12V/ 500mA
Dimension of Lock (mm)	166 (L) x 38.6 (W) x 21.5 (H)	203 (L) x 44 (W) x 40 (H)	250 (L) x 47.2 (W) x 26.6 (H)	266 (L) x 73 (W) x 40 (H)
Dimensions of Armature Plate	130 (L) x 32 (W) x 8 (H)	185 (L) x 38 (W) x 12.5 (H)	185 (L) x 38 (W) x 12.5 (H)	185 (L) x 61 (W) x 16 (H)
Optional Brackets	Model	Model	Model	Model
L&Z Bracket	MLA-300	MLA-005	MLA-002	MLA-1200
Bracket for Strike Plate	N/A	MLA-003	MLA-003	MLA-1201
U Bracket for Glass Door	MLD-301	MLA-004	MLA-004	MLA-004

300LB Lock Surface Mount




MLA-300

600LB Lock Surface Mount




MLA-002



MLA-004

Door Installation

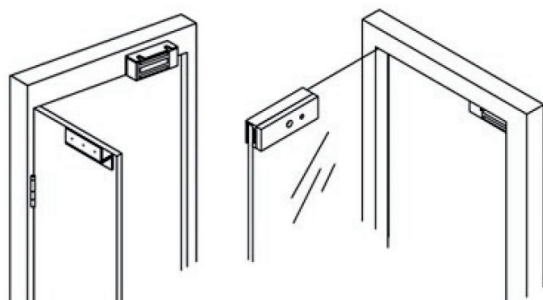


LZ Bracket


U Bracket

(Suitable in-swing door leaf) (Suitable glass door leaf)

1200LB Lock Surface Mount



MLA-1200



MLA-004